

## FEATURES

- Output voltage  $6 V_{pp}$
- Flat gain up to 28 GHz
- Single voltage power supply
- Gain and crossing point adjustment

## APPLICATIONS

- LiNbO<sub>3</sub> & InP modulators
- 28 Gbps - 44 Gbps NRZ / RZ
- SONET OC-768 / SDH-256
- Research & Development

## OPTIONS

- Heat-sink
- Analog version
- 2.4 mm RF connectors

## RELATED EQUIPMENTS

- MX-LN-20, MXAN-LN-20 modulators
- MBC-DG Automatic Bias Controllers

The DR-DG-28-MO is a driver module optimized for digital applications at 28 Gbps – 32 Gbps data rate. It exhibits an output voltage of  $6 V_{pp}$  and a broad bandwidth of 28 GHz.

The DR-DG-28-MO is housed in a compact package that integrates voltage regulators allowing for flexible biasing, while internal bias sequencing circuitry assures robust operation and single voltage power supply for maximum ease of use. It features two control inputs: one for gain control, the second one for crossing point adjustment. The RF connectors are K type, allowing easy and repeatable connections.


The DR-DG-28-MO combines high performance and user friendliness, it is the ideal device to drive 28 Gbps modulators and to obtain widely opened optical eye diagrams with short jitter and high SNR.

## Performance Highlights

| Parameter           | Min  | Typ | Max  | Unit     |
|---------------------|------|-----|------|----------|
| Cut-off Frequencies | 50 k | -   | 28 G | Hz       |
| Output Voltage      | -    | 6   | 9    | $V_{pp}$ |
| Gain                | -    | 30  | -    | dB       |
| Saturated Power     | -    | 6   | -    | dBm      |
| Added Jitter        | -    | 900 | -    | fs       |
| Rise / Fall Times   | -    | 12  | 14   | ps       |

Measurements for  $V_{bias} = 10 V$ ,  $V_{amp} = 0.45 V$ ,  $V_{xp} = 0.3 V$ ,  $I_{bias} = 380 mA$

## 28 Gbps Output Response

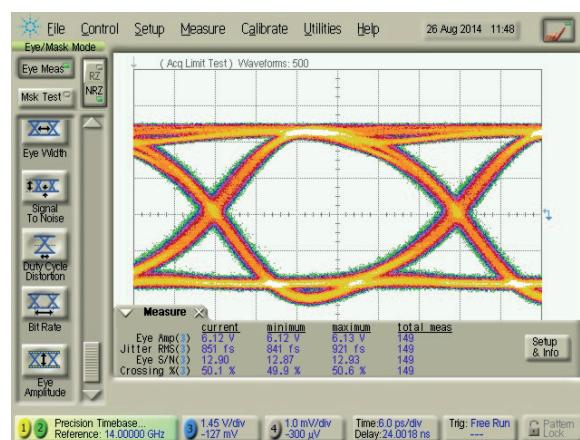

## DC Electrical Characteristics

| Parameter                   | Symbol     | Min | Typ | Max  | Unit |
|-----------------------------|------------|-----|-----|------|------|
| Supply voltage (fixed)      | $V_{bias}$ | 9   | 10  | 12.5 | V    |
| Current consumption         | $I_{bias}$ | -   | 300 | 450  | mA   |
| Gain control voltage        | $V_{amp}$  | 0   | 0.4 | 1.2  | V    |
| Cross point control voltage | $V_{xp}$   | 0   | 0.3 | 0.9  | V    |

## Electrical Characteristics

| Parameter             | Symbol           | Condition   | Min | Typ       | Max | Unit     |
|-----------------------|------------------|---|-----|-----------|-----|----------|
| Lower frequency       | $f_{3dB, lower}$ | -3 dB point   | 45  | -         | 50  | kHz      |
| Upper frequency       | $f_{3dB, upper}$ | -3 dB point   | 25  | 28        | -   | GHz      |
| Gain                  | $S_{21}$         | Small signal  | -   | 30        | -   | dB       |
| Gain ripple           | -                | < 28 GHz  | -   | $\pm 1.5$ | -   | dB       |
| Input return loss     | $S_{11}$         | 50 MHz < f < 20 GHz                                   | -   | -10       | -9  | dB       |
| Output return loss    | $S_{22}$         | 50 MHz < f < 20 GHz                                   | -   | -10       | -9  | dB       |
| Saturated power       | $P_{sat}$        | $V_{in} = 0.5 V_{pp}$                                 | -   | 23        | -   | dBm      |
| Output voltage        | $V_{out}$        | $V_{in} = 0.5 V_{pp}$                                 | 4   | 6         | 9   | $V_{pp}$ |
| Rise time / Fall time | $t_r/t_f$        | 20 % - 80 %   | -   | 12        | 14  | ps       |
| Added jitter          | $J_{RMS}$        | $J_{RMS} = \sqrt{J_{RMS-total}^2 - J_{RMS-source}^2}$ | -   | 0.9       | -   | ps       |
| Power dissipation     | P                | $V_{out} = 6 V_{pp}$                                  | -   | 3         | -   | W        |

Conditions:  $V_{in} = 0.5 V_{pp}$ ,  $T_{amb} = 25^\circ C$ , 50  $\Omega$  system


## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

| Parameter                   | Symbol     | Min | Max | Unit     |
|-----------------------------|------------|-----|-----|----------|
| RF input voltage            | $V_{in}$   | -   | 1   | $V_{pp}$ |
| Supply Voltage              | $V_{bias}$ | 0   | 13  | V        |
| DC current                  | $I_{bias}$ | 0   | 450 | mA       |
| Gain control voltage        | $V_{amp}$  | 0   | 1.5 | V        |
| Cross point control voltage | $V_{xp}$   | 0   | 1   | V        |
| Power dissipation           | $P_{diss}$ | -   | 5.8 | W        |
| Temperature of operation    | $T_{op}$   | -5  | +50 | °C       |
| Storage temperature         | $T_{st}$   | -40 | +70 | °C       |


### $S_{21}$ Parameter Curve

Conditions:  $V_{bias} = 10 \text{ V}$ ,  $V_{amp} = 0.4 \text{ V}$ ,  $V_{xp} = 0.2 \text{ V}$ ,  $I_{bias} = 365 \text{ mA}$

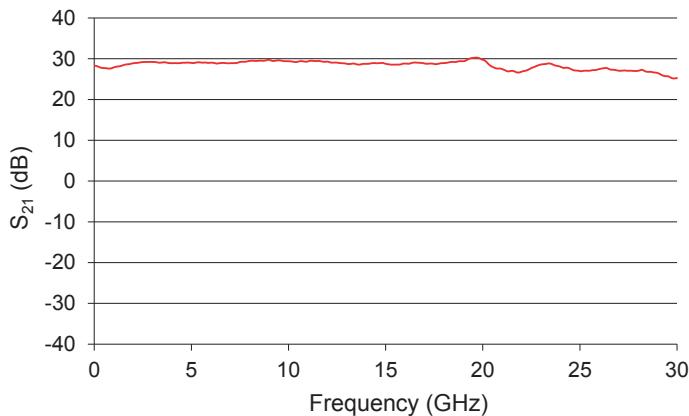


### $S_{22}$ Parameter Curve

Conditions:  $V_{bias} = 10 \text{ V}$ ,  $V_{amp} = 0.4 \text{ V}$ ,  $V_{xp} = 0.2 \text{ V}$ ,  $I_{bias} = 365 \text{ mA}$

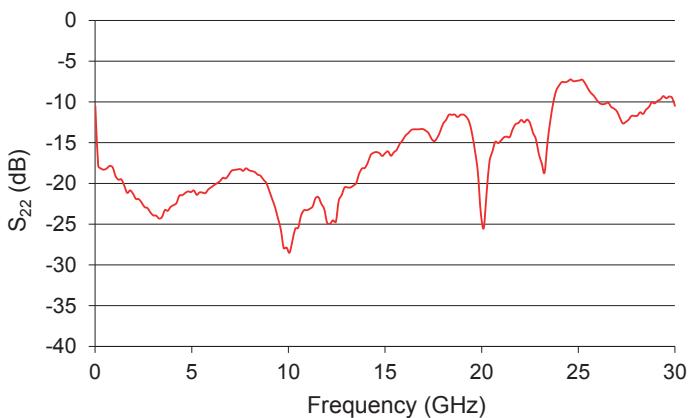


### $S_{12}$ Parameter Curve

Conditions:  $V_{bias} = 10 \text{ V}$ ,  $V_{amp} = 0.4 \text{ V}$ ,  $V_{xp} = 0.2 \text{ V}$ ,  $I_{bias} = 365 \text{ mA}$

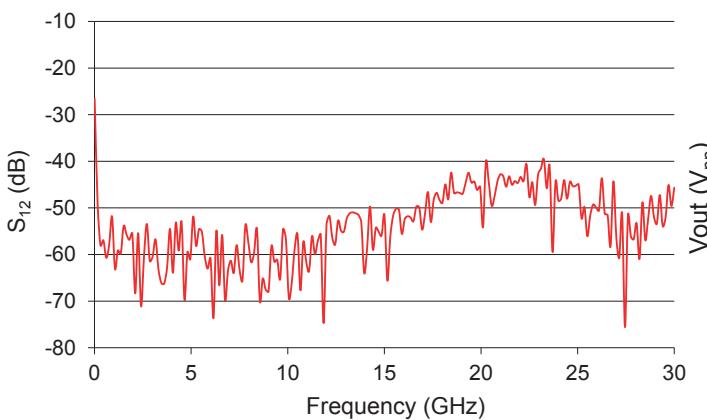


### Group Delay Parameter Curve

Conditions:  $V_{bias} = 10 \text{ V}$ ,  $V_{amp} = 0.4 \text{ V}$ ,  $V_{xp} = 0.2 \text{ V}$ ,  $I_{bias} = 365 \text{ mA}$

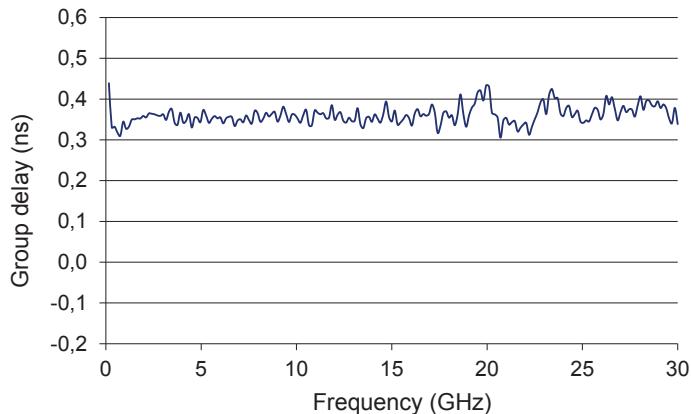


### $S_{11}$ Parameter Curve

Conditions:  $V_{bias} = 10 \text{ V}$ ,  $V_{amp} = 0.4 \text{ V}$ ,  $V_{xp} = 0.2 \text{ V}$ ,  $I_{bias} = 365 \text{ mA}$

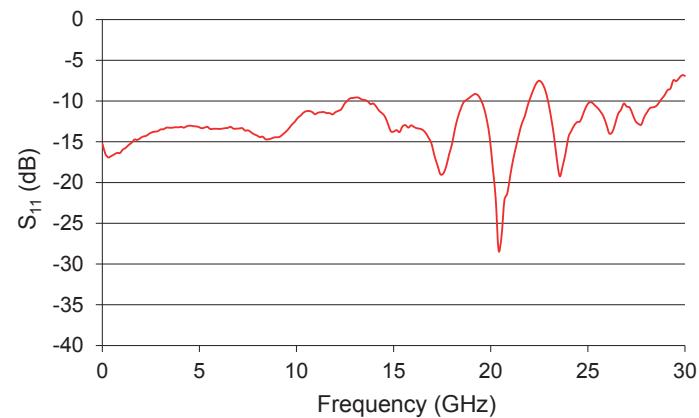

### Typical Output Voltage Amplitude VS Gain Control Vamp Tuning


Conditions:  $V_{bias} = 10 \text{ V}$ ,  $V_{xp} = 0.2 \text{ V}$

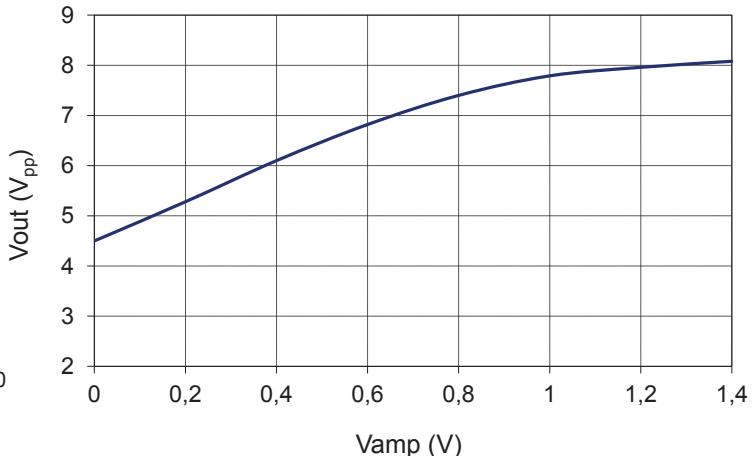

## Eye Diagrams


### 20 Gbps data rate

Conditions: Ratio 1/2 , Pattern 2<sup>31</sup>-1  
 $V_{bias} = 10 \text{ V}$ ,  $V_{amp} = 0.45 \text{ V}$ ,  $V_{xp} = 0.3 \text{ V}$ ,  $I_{bias} = 380 \text{ mA}$

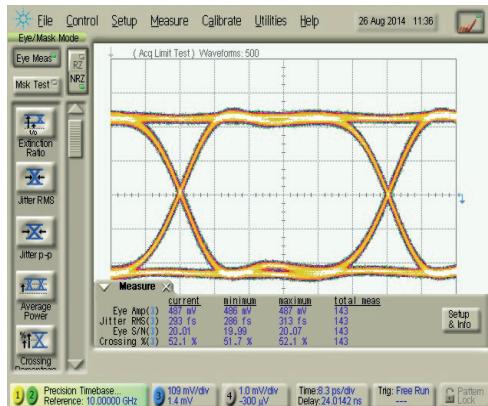


#### Input signal

Eye amplitude = 0.487 V<sub>pp</sub>, Rise time = 9.78 ps  
Jitter RMS = 293 fs, SNR = 20

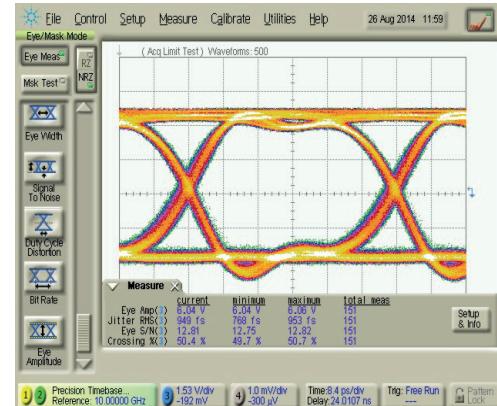


#### Output response

Eye amplitude = 6.04 V<sub>pp</sub>, Rise time = 11.76 ps  
Jitter RMS = 949 fs, SNR = 12.8

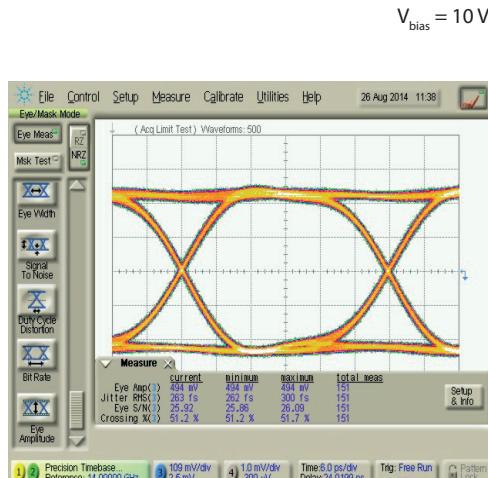

#### Input signal


Eye amplitude = 0.494 V<sub>pp</sub>, Rise time = 10 ps  
Jitter RMS = 263 fs, SNR = 25.9

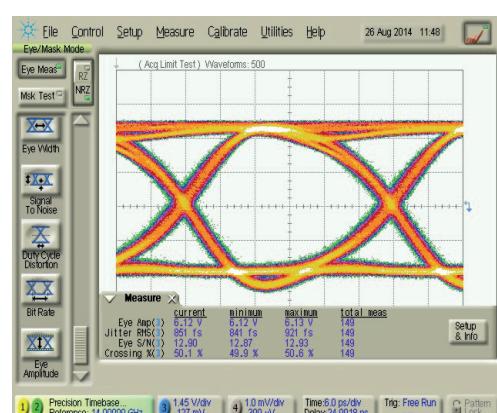

#### Output response


Eye amplitude = 6.12 V<sub>pp</sub>, Rise time = 12.13 ps  
Jitter RMS = 851 fs, SNR = 12.9

### Electrical Schematic Diagram

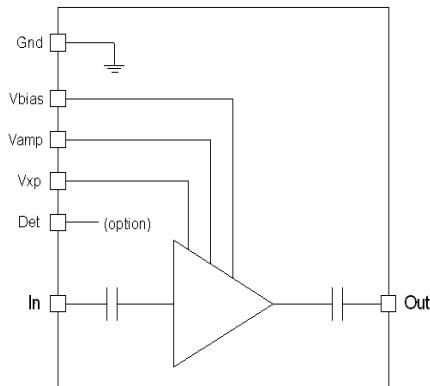

### Mechanical Diagram and Pinout

All measurements in mm

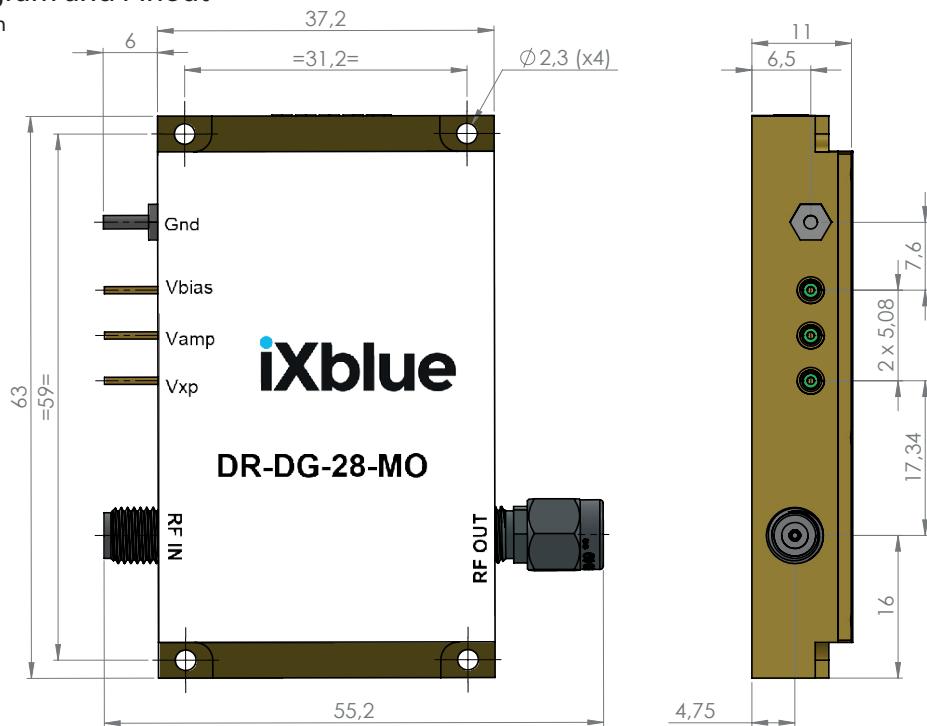


**⚠** The heatsinking of the module is necessary. It's user responsibility to use an adequate heatsink. Refer to page 6 for iXBlue recommended heatsink.

| PIN        | Function                              | Unit                                  |
|------------|---------------------------------------|---------------------------------------|
| IN         | RF In                                 | K connector female                    |
| OUT        | RF Out                                | K connector male                      |
| $V_{bias}$ | Power supply voltage                  | Set a typical operating specification |
| $V_{amp}$  | Output voltage amplitude adjustment   | Adjust for gain control tuning        |
| $V_{xp}$   | Output voltage cross point adjustment | Adjust for cross point control tuning |

### Mechanical Diagram And Pinout With HS-MO3 Heatsink

All measurements in mm

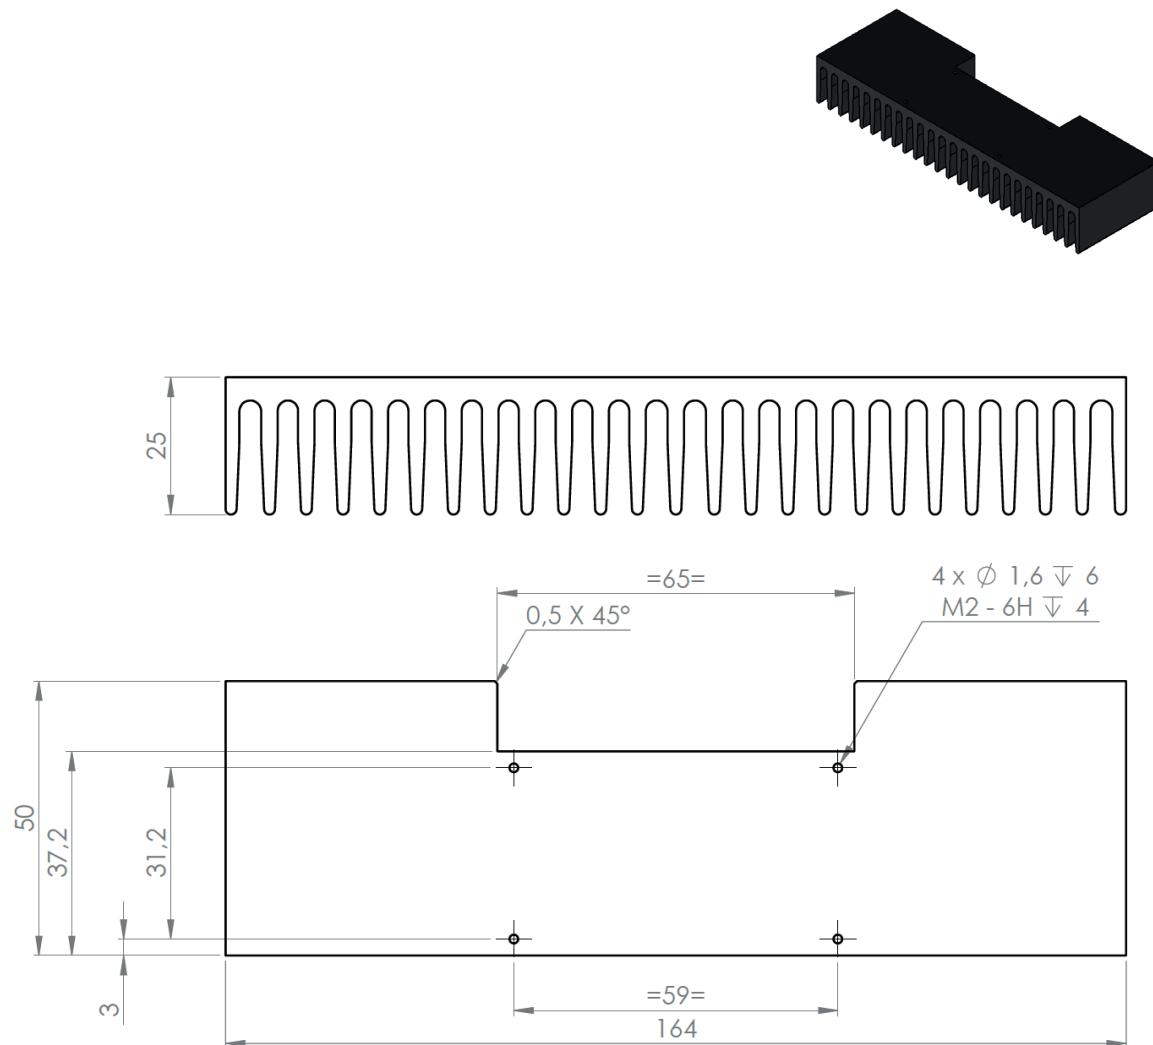

### About us

iXBlue Photonics produces specialty optical fibers and Bragg gratings based fiber optics components and provides optical modulation solutions based on the company lithium niobate ( $\text{LiNbO}_3$ ) modulators and RF electronic modules. iXBlue Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.

3, rue Sophie Germain  
25 000 Besançon - FRANCE  
Tel. : +33 (0) 381 853 180 - Fax : +33 (0) 381 811 557

iXblue reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein. All statements, specification, technical information related to the products herein are given in good faith and based upon information believed to be reliable and accurate at the moment of printing. However the accuracy and completeness thereof is not guaranteed. No liability is assumed for any inaccuracies and as a result of use of the products. The user must validate all parameters for each application before use and he assumes all risks in connection with the use of the products