

LuOcean Mini 8 Preliminary

Diode Laser @ 793 nm - 1940 nm up to 130 W



Description:

The Lumics **LuOcean Mini 8** diode laser series offers OEM integrators an excellent product to manufacture state-of-the-art end-user laser systems.

The easy integration and safe use of these laser components in combination with several accessories and features give the chance to be cost-efficient in development and manufacturing.

Features & Functions:

- Up to four wavelengths
- 105µm - 600µm NA 0.22 fiber
- Emitter electrically in series
- Temperature sensor
- Pilot intensity (voltage controlled)

Options:

- Exchangeable window
- Red or green pilot
- Fiber sensor
- Power monitor
- OEM LD Driver


Benefits:

- Single emitter long lifetime
- Passive cooling
- Sealed housing
- Small foot print
- SMA connector

Applications:

- Therapeutic
- Dental
- Dermatology
- Veterinary
- Pumping

Module Drawing (Dimensions in mm)

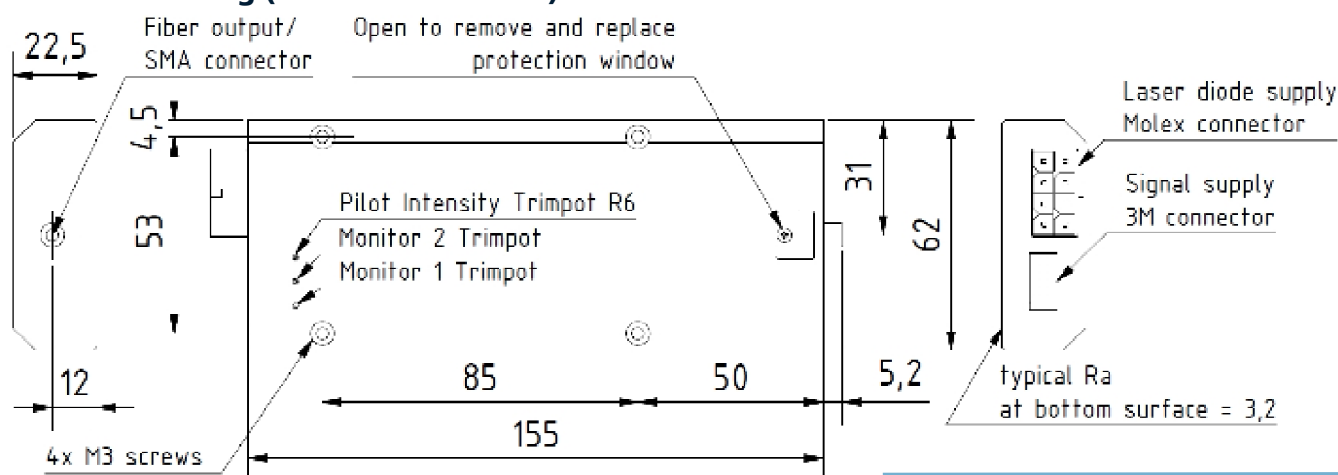

Connector - laser diode supply

MolexTM connector (Part No. 172064-0008).


Pin connection dependant on individual electro-optical configuration. Maximum current per pin is 26 A if total current to cathode exceeds 26 A two pins must be connected to cathode of driver board

Counterparts for external cable

Molex Mega-Fit Receptacle Housing Part No. 171692-0108

Molex Mega-Fit Female Crimp Terminal

Part No. 76823-0322




Connector - signals

3MTM connector on laser module (Part No. 159112-5012)

Counterpart for external cable

Molex Milli Grid Cable to Board Receptacle

Part No. 87568-1273. Flat ribbon cable with pitch of 1mm and AWG28.



Pin	Configuration
1	Laser diode common cathode (-)
2	wavelength x (+ or -) depending on configuration
3	wavelength x (+ or -) depending on configuration
4	wavelength x (+ or -) depending on configuration
5	wavelength x (+ or -) depending on configuration
6	wavelength x (+ or -) depending on configuration
7	wavelength x (+ or -) depending on configuration
8	wavelength x (+ or -) depending on configuration

Pin	Configuration
1	Supply +12V
2	Fiber Sensor 1 Out (0-12V) (*)
3	GND1
4	Fiber Sensor 2 Out (0-12V) (*)
5	Monitor Photo Diode 1 Out (0-4(**))V (*)
6	Pilot Supply (5 V red, 8 V green) (*)
7	Monitor Photo Diode 2 Out (0-4(**))V(*)
8	Pilot GND2
9	NTC / PT100 / LM35 Supply 5V (*)
10	Pilot intensity control In (0-5)V (*)
11	First NTC / PT100 / LM35 Signal (*)
12	Second NTC / PT100 / LM35 Signal (*)

* optional, ** max of 0.5V only for 19xxnm

We manufacture diode lasers.

Typical laser specifications at 25°C (*) (Preliminary data)

Wavelength at Pop[nm] (4)	Fiber Diameter [μm]	max. Power Pop [W] (1,2,3)	Operating Current [A] / Operating Voltage [V]
793/808	105	20	4 / 14
793/808	200	38	7 / 14
793/808	400	55	11 / 14
793/808	600	70	15 / 14
890	200	75	15 / 14
915/940/980	105	45	11 / 13
940/980	200	90	15 / 13
915/940/980	400	130	25 / 13
1064	200	75	15 / 12
1470	200	30	12 / 9.7
1470	400	40	21 / 9.7
1940	(200)/400	(10)12	(7.5 / 11) 8.5 / 11
808 & 1064 (dual)	200	19 & 28	7 / 10 & 15 / 5
808 & 1064 (dual)	400	27 & 28	11 / 10 & 15 / 5
808 & 980 (dual)	400	27 & 50	11 / 10 & 25 / 5
980 & 1470 (dual)	200	30 & 18	15 / 6 & 12 / 7
980 & 1470 (dual)	400	50 & 25	25 / 6 & 21 / 7
760 & 1064 (dual)	1000	45 & 60	20 / 8 & 26 / 7
1064 & 1940 (dual)	400	19 & 8	21 / 5 & 9.5 / 8
1470 & 1940 (dual)	400	15 & 8	21 / 5 & 9.5 / 8
670 & 808 (dual)	105	2.5 & 10	1.5 / 8 & 4 / 8
808 & 980 & 1064 (triple)	400	19 & 30 & 28	11 / 6 & 25 / 4 & 15 / 5
670 & 808 & 9xx (triple)	400	2.5 & 19 & 30	1.5 / 6 & 11 / 6 & 25 / 3.5

Parameter	Symbol / Conditions	Min	Typ	Max	Unit
Other General Features					
Conversion Efficiency (5)	depending	38% (7/8xxnm), 45% (9/10xxnm), 25% (14xxnm), 15% (19xxnm)			%
Spectral Shift with Temp. <1100nm	λ _T Shift		0.3		nm / K
Spectral Shift with Temp. 14xxnm	λ _T Shift		0.7		nm / K
Spectral Shift with Temp. 19xxnm	λ _T Shift		1.1		nm / K
Fiber Centricity			+/-10 (+-5μm for 105μm fiber core)		μm
Numerical Aperture	NA		0.22		
Fiber Connector Type			SMA905		
Pilot Beam (Option)					
Pilot Beam Output Power	red/green - adjustable (6)	0		3	mW
Pilot Beam Wavelength	red/green		650/520		nm
Pilot Beam Operating Voltage	red/green	4/7		5/8	V
Pilot Beam Operating Current	red/green			<35/200	mA
Pilot Beam Intensity Control Voltage	red/green (7)	0(max. Intensity)		5(min. Intensity)	V
Sensors (Options)					
Power Monitor Supply Voltage				12	V
Power Monitor Signal Voltage		0		4(0.5V for 19xxnm)	V
Fiber Detection Sensor Supply Voltage				12	V
Fiber Detection Sensor Signal Voltage		0		12	V
Temperature Sensor				Standard NTC (10k) or optional (PT100 or LM35)	

Notes: * taken at internal temperature sensor, **Laser wavelength between 880nm and 920nm** require an AR <0.7% (+10nm around peak wavelength) coated fiber facet, end cap on fiber facet module side or power reduction of 30%. Avoid direct feedback from materials like mirrors, optics, processed material etc. back into laser module via the fiber cable by more than 10%.


- (1) Power is measured ex fiber according to given fiber specifications including measures and tolerances of fiber and ferrules for uncoated fiber facets (**exception see ***).
- (2) Do not exceed maximum forward current for rated power as given above by more than 5% otherwise the laser diode may be damaged
- (3) Rule of thumb: Power ex fiber decreases up to 5% (<1100nm) and up to 7% (>1400nm) every 10 °C temperature increase at internal temperature sensor. Lifetime decreases by about factor of two every 10 °C. Required flatness of customer heat sink 0.05mm over 70mm to achieve necessary contact to the heat sink.
- (4) Individual configurations of wavelengths on request
- (5) For 670nm the conversion efficiency is about 30%.
- (6) Adjust trimpot R6 when Intensity pin 10 control is left open
- (7) Adjust trimpot R4 to achieve 0%-100% pilot intensity for 5V to 0V at pin 10
- (8) Read and carefully follow operating manual instructions. Especially - whenever power supply is switched on or off, always disconnect from laser module. See manual for details.

General Parameters / Accessories

Parameter	Symbol	Min	Typ	Max	Unit
Storage Temperature	T _s	0		55	°C
Operation Temperature *	T _{op}	10		45	°C
Humidity / Non-condensing Atmosphere **				90	%
Recommended Thermal Heatsink Resistance				0.1	K / W
Weight			300		g
Compliance			CE, ROHS		
Further Options (Please ask for quotation if needed)					
2nd Monitor Diode / 2nd Fiber Detection Sensor					
Optical Fiber Patchcord with SMA Connectors, Laser diode drivers for each individual wavelength, Interface cable					

* taken at internal temperature sensor - power drop read note (4) ** we recommend to operate the laser above dew point

User Safety



We manufacture diode lasers.

Fiber Connector

(1) Lumics laser diode fiber coupling technology ensures loss into the fiber cladding of <2% of the total power if the fiber centricity is below 10µm and ferrule diameter and distance of the fiber end facet to the reference plane complies with shown technical drawing. Use a fiber microscope to check for dust free fiber end facet and fiber centricity.

(2) Free standing fibers suffer from higher risk of fiber damage to the fiber tip due to mechanical stress by handling and the fiber end facet can not be polished as simple as for not free standing fibers.

(3) For more information see http://www.lumics.de/wp-content/uploads/lu_fiber_patchcords.pdf

