


LU0760M150

150mW 760nm Laser Module, Single Mode Pump Laser

Preliminary

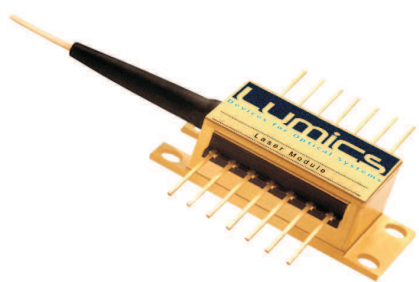

The single mode fiber pigtailed laser diode module contains an optimized GaAs substrate based quantum well high power laser diode. The extremely stringent reliability requirements are achieved through our patent pending innovative technology. This includes careful design, exactly defined manufacturing and extensive testing. The qualification contains a set of optoelectronic, thermal and mechanical tests. Each laser diode module is individually serialized for traceability and is shipped with a specified set of test data.

Features & Functions:

- Wavelength 760nm
- Ultra narrow line width 0.04pm (10MHz)
- ASE noise suppression 30dB
- Up to 150mW c.w. operating power
- Rise time < 2nsec
- Internal TEC temperature stabilisation

Options:

- PM fiber option


Benefits:

- All laser welded
- Field proven reliability
- Hermetic sealing
- Telcordia compliant package
- RoHS compliant


Applications:

- Frequency doubling
- Sensor applications

Module Drawing (dimensions in mm)

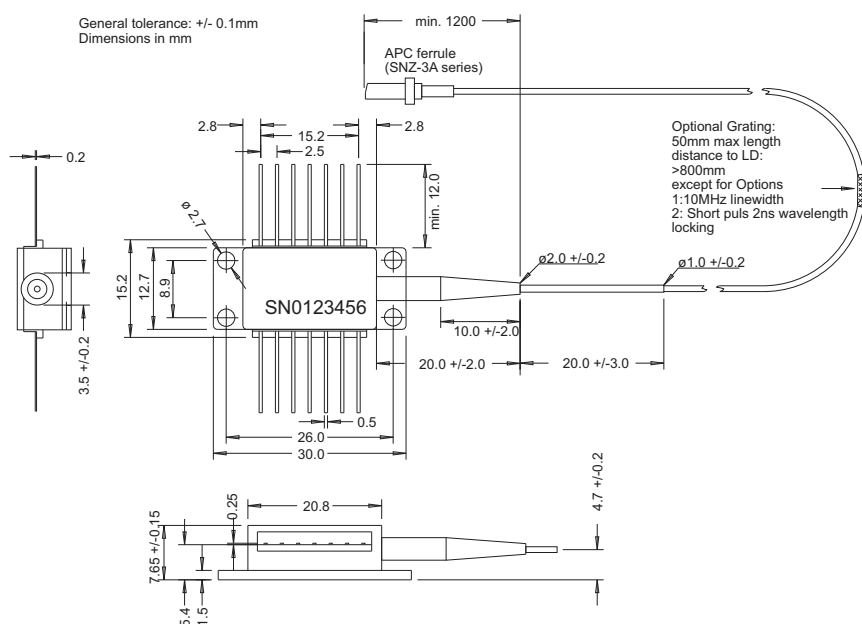

Pin Connections

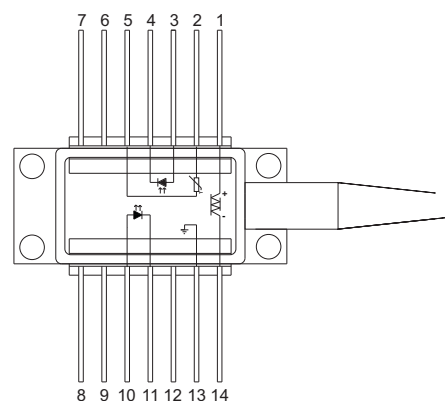

Pin	Function	Pin	Function
1	Cooler (+)	8	nc
2	Thermistor	9	nc
3	PD Anode (+)	10	LD Anode (+)
4	PD Cathode (-)	11	LD Cathode (-)
5	Thermistor	12	nc
6	nc	13	Case ground
7	nc	14	Cooler (-)

We manufacture diode lasers.

Electrical and Optical Characteristics (at 25°C (T_{chip} and T_{case}) and Begin of Life (BOL)):

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Operating power (1)	c.w.	P _{op}		150		mW
Operating current	c.w.	I _{op}		250		mA
Pulsed operating peak power	< 500ns / duty cycle <5%	P _{op}		250		mW
Pulsed operating peak current	< 500ns / duty cycle <5%	I _{op}		350		mA
Rise and fall time				2		nsec
Threshold current		I _{th}		50		mA
Forward voltage	at I _{op}	V _{op}		2		V
Peak wavelength λ _{peak}	at P _{op}	λ	759	760	761	nm
Spectral width (FWHM) (2)	at P _{op} , with FBG	Δ λ		0.04		pm
Spectral width (FWHM)	at P _{op} , with FBG	Δ λ		10		MHz
Optical power stability	at I _{op} , t = 60 sec	P _{op} / t		0.3		%
Polarization extinction ratio (3)	PM fiber version		6	12		dB
Spectral shift with temp.	FBG Temp.	Δ / T			0.02	nm/ °C
ASE noise suppression	at P _{op} , with FBG			30		dB
Monitor responsivity		R	0.04	0.08	2	μA / mW
Monitor dark current			5		40	nA
TEC current	chip 25°C, case 70°C	I _{TEC}		0.9		A
TEC voltage	chip 25°C, case 70°C	V _{TEC}		1.7		V
Thermistor resistance	T=25°C	R _{th}	9.5	10	10.5	kOhm
Thermistor B constant		B	3850	3950	4050	K
Steinhart-Hart-Equation coefficients	C ₁ = 1.1292E-03 / C ₂ = 2.3411E-04 / C ₃ = 8.7755E-08					
Fiber Specifications						
Fiber type	HI 780 or PM Fiber PM780 Type PANDA					

Note:



- (1) operating power shows kinks approx. every 10mA - 100mA in defined power range due to single longitudinal laser mode hopping
- (2) FWHM is valid in the current regime free of mode hopping. Smallest and stable line width over time is only achieved with drift and noise free laser diode driver and temperature controller meaning current drift below 0.1mA and noise band <10 μA up to 10 MHz as well as internal temperature drift below 0.2°C.
- (3) Intensity noise of light from modules with PM fiber after polarisation increases with lower polarization extinction ratio (example 6 /10/13 dB can result in intensity noise as high as 50/20/5%). The intensity noise is sensitive to varying stress (by mechanical and temperature effects) introduced to the PM fiber.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage temp.	T _{max}	-40	85	°C
Operating case temp.	T _{op, case}	-20	70	°C
Operating chip temp.	T _{op, chip}	20	40	°C
Soldering temp. (max. 10sec)			260	°C
LD forward current (c.w.)	I _{op max}		350	mA
LD forward current (Pulse 200ns/Period 30μsec)			0.6	A
LD reverse voltage	V _{R, max}		2	V
Monitor forward current	I _{F, PD}		5	mA
Monitor reverse voltage	V _{R, PD}		20	V
TEC current	I _{TEC}		2.5	A
TEC voltage	V _{TEC}		3.2	V
ESD damage (2)			500	V
Fiber pigtail bend radius		25		mm

(3) A standard human body model (1.5kOhm, 1000pF) is used for ESD thresholds

User Safety

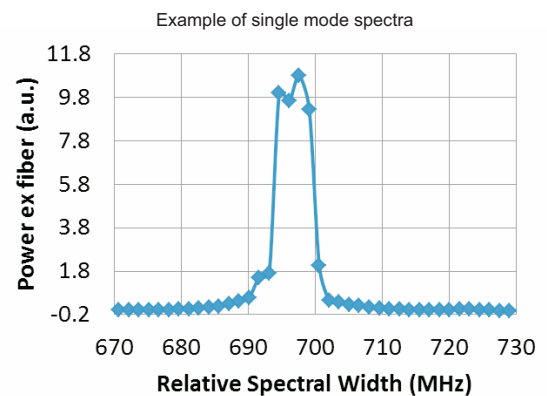

We manufacture diode lasers.